

**Product Sheet****Levante Floodlight**

Options: small  
 Colour temperature: 4000 K  
 Type of optics: rotosymmetrical narrow beam RS-C

**06LV3B2004CHM3**

Colour: Sablé 100 Noir

Project Num.

Date

**General features**

Description: LED floodlight

Insulation class: class II

Nominal voltage: 230 V 50 Hz

Protection level IP: IP66

Protection against impact: IK07

Power factor: &gt; 0.90

Ambient temperature Ta: -30°C +50°C

Weight: 3.00 kg

Maximum exposed surface: 0.08 m<sup>2</sup>Lateral exposed surface: 0.0165 m<sup>2</sup>


Common mode overvoltage protection: 6 kV

Differential mode overvoltage protection: 10 kV

Driver: included

Labels and Certifications: ENEC / CE

Warranty: 5 years for LED fittings

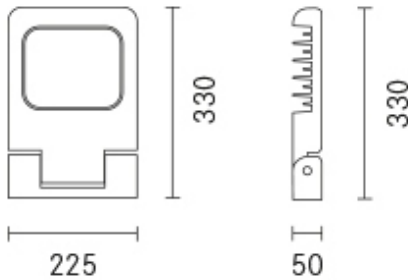

H (m)	Ø (m)	Em (lux)
1	0.26	23164
2	0.53	5791
3	0.79	2574
4	1.06	1448
5	1.32	927

**Performance Data\***

LED current:	700 mA	525 mA	350 mA
Flux source:	4090 lm	3215 lm	2260 lm
Power source:	24 W	17,5 W	11,5 W
Efficiency of source:	170 lm/W	184 lm/W	197 lm/W
Flux fitting:	3315 lm	2605 lm	1830 lm
Power fitting:	28 W	21,5 W	15 W
Efficiency of fitting:	118 lm/W	121 lm/W	122 lm/W
Dazzling index category:	D6	D6	D6

### Optical System

Source: LED R1

Colour temperature: 4000 K

Colour rendering index (CRI):  $\geq 70$

Type of optics: rotosymmetrical narrow beam RS-C

Optical unit lifetime: >160,000h @700mA @Ta25°C TM21 L80B20  
>160,000h @700mA @Ta25°C TM21 L80B10

Photobiological safety class: EXEMPT GROUP

ULOR: 0%

DLOR: 100%

Luminous intensity category: G\*6

### Normative framework

EN605981 / EN60598-2-3 / EN60598-2-5 / EN62471 / EN61547

### Flux regulation

	Standard	On request
Predisposition for Zhaga Socket (Book 18)		X
Self-learning virtual midnight	X	
1-10V Regulation		X
Main voltage variation		X
Pilot line		X
DALI Regulation		X
Remote control system (PLC) telemanagement		X
Wireless telemanagement		X
Motion / brightness detectors		X

### Installation and maintenance

Installation: wall / ground / pole

Poles diameter:  $\varnothing$  60 - 76 - 102 mm

Fastening: adjustable bracket with click positioning and a 15° step

$\varnothing$  power cable: 10 ÷ 14 mm

Cable gland: PG11

### Materials

Body: die-cast aluminium alloy UNI EN AB 47100 (copper content < 1%)

Lenses: PMMA

Seal: extruded anti-age silicone

Screws: stainless steel AISI 304

Finish: phospho-chromatation treated and polyester powder-coated in 16 phases to increase weather resistance


### Colors

Sablé 100 Noir Cod. **06LV3B2004CHM3**

grey RAL9006 Cod. **06LV3B2004AHM3**


white RAL9003 Cod. **06LV3B2004DHM3**

### Complements

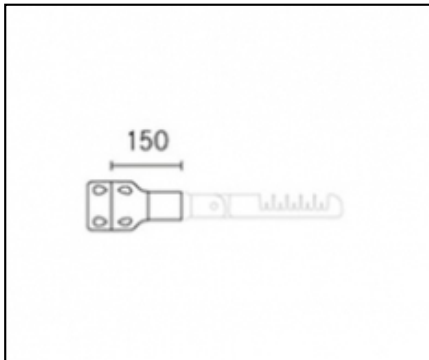


#### 06AK903A0

L3 joint kit single for  $\varnothing$  60-76 mm poles.  
Colour: dark grey RAL9006.

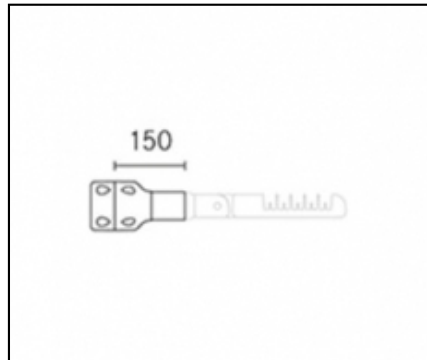


#### 06AK903C0

L3 joint kit single for  $\varnothing$  60-76 mm poles.  
Colour: dark grey Sablé 100 Noir.

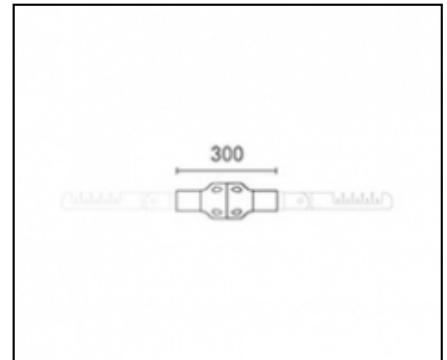


#### 06AK904A0

L4 joint kit double for  $\varnothing$  60-76 mm poles.  
Colour: grey RAL9006.

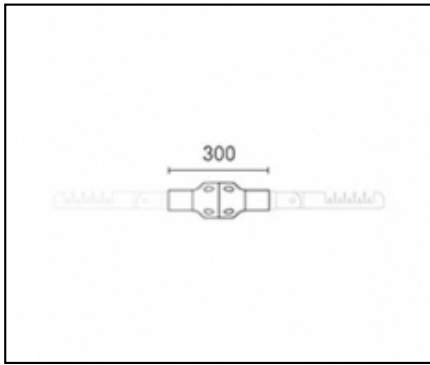


**06AK904C0**

L4 joint kit double for Ø 60-76 mm poles.  
Colour: dark grey Sablé 100 Noir.

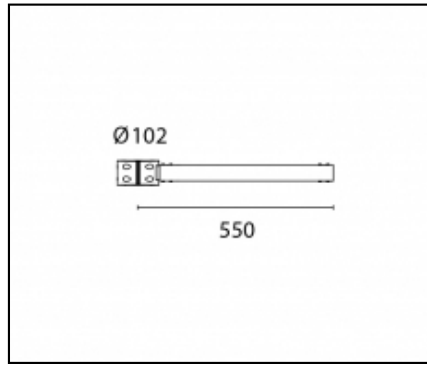


**06AK907C0**

B155 Single arm L550mm pole Ø102mm

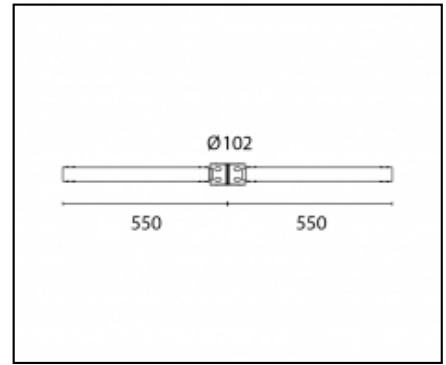

**06AK909C0**

B157 Double arm L550mm pole Ø102mm

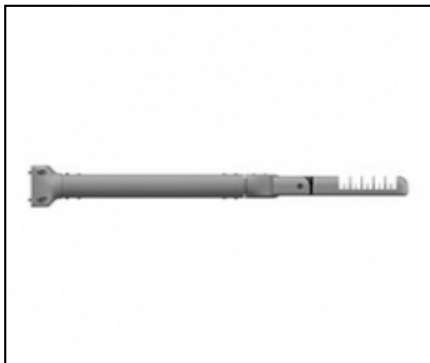

**06AK951A0**

B1 P arm for wall-mounting. Colour: grey  
RAL9006.



**06AK951C0**

B1 P arm for wall-mounting. Colour: dark  
grey Sablé 100 Noir.



**06AK952A0**

L9 joint LEVANTE SMALL for Ø 60 mm pole.  
Colour: grey RAL9006.



**06AK952C0**

L9 joint for Ø 60 mm pole. Colour: dark grey  
Sablé 100 Noir.



**06AK952D0**

L9 joint LEVANTE SMALL for Ø 60 mm pole.  
Colour: white RAL9003.



**06AK953C0**

I1 Spike for ground installation Colour: dark  
grey Sablé 100 Noir.

**NOTE**

**\*Performance Data**

Values indicated in this technical sheet are to be considered nominal values with a tolerance of +/-7%.

Data of the lighting source flux and efficiency refer to the LED module, without lenses. In case you need data of the LED module complete with lenses, please multiply the mentioned data by 0.9 factor.

**General Data**

The features of the product listed above may be subjected to change without notice. They will have to be confirmed in case of order. In order to facilitate a constant updating of their products, Cariboni Group reserves the right to make changes without prior notice.