

Product Sheet

Path Pole

Options: POLE H. 500
Colour temperature: 3000 K
Type of optics: rotosymmetrical wide beam

06PT2A8495A

Colour: grey RAL9006




Project Num.

Date



General features

- Description: Bollard
- Insulation class: class II
- Nominal voltage: 230 V 50 Hz
- Protection level IP: IP65
- Protection against impact: IK07
- Power factor: > 0.90
- Ambient temperature Ta: -30°C +50°C
- Weight: 6.00 kg
- Driver: included
- Labels and Certifications: CE
- Warranty: 5 years for LED fittings



Performance Data*

LED current:	500 mA
Flux source:	1300 lm
Power source:	12 W
Flux fitting:	930 lm
Power fitting:	14 W

Optical System

Source: 8 LEDs

Colour temperature: 3000 K

Colour rendering index (CRI): ≥ 80

Type of optics: rotosymmetrical wide beam

Normative framework

EN605981 / EN60598-2-1 / EN62471

Installation and maintenance

Installation: ground

Fastening: Screw anchors (or anchoring bolts available as an accessory)

Ø power cable: 8 ÷ 12 mm

Cable gland: M20

Materials

Body: die-cast aluminium alloy UNI EN AB 47100 (copper content < 1%)

Diffusor: higly transparent polycarbonate

Floodlight: torted aluminium sheet for fastening metal anchors

Seal: extruded anti-age silicone

Screws: stainless steel AISI 304

Finish: phospho-chromatation treated and polyester powder-coated in 16 phases to increase weather resistance

Colors

grey RAL9006

Cod. **06PT2A8495A**


Sablé 100 Noir

Cod. **06PT2A8495C**

Complements

06PT997C0

2 petals kit Colour: dark grey sablé 100 noir.

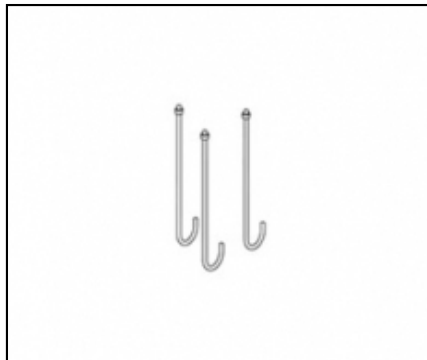

06PY999X0

Anchoring bolts kit

NOTE***Performance Data**

Values indicated in this technical sheet are to be considered nominal values with a tolerance of +/-7%.

Data of the lighting source flux and efficiency refer to the LED module, without lenses. In case you need data of the LED module complete with lenses, please multiply the mentioned data by 0.9 factor.

General Data

The features of the product listed above may be subjected to change without notice. They will have to be confirmed in case of order.

In order to facilitate a constant updating of their products, Cariboni Group reserves the right to make changes without prior notice.