

**Product Sheet**

**Path Pole**

Options: POLE H. 500  
Colour temperature: 4000 K  
Type of optics: rotosymmetrical wide beam

**06PT2A8405A**

Colour: grey RAL9006




Project Num.

Date



**General features**

- Description: Bollard
- Insulation class: class II
- Nominal voltage: 230 V 50 Hz
- Protection level IP: IP65
- Protection against impact: IK07
- Power factor: > 0.90
- Ambient temperature Ta: -30°C +50°C
- Weight: 6.00 kg
- Driver: included
- Labels and Certifications: CE
- Warranty: 5 years for LED fittings



**Performance Data\***

LED current:	500 mA
Flux source:	1390 lm
Power source:	12 W
Flux fitting:	1000 lm
Power fitting:	14 W

---

**Optical System**

---

Source: 8 LEDs

Colour temperature: 4000 K

Colour rendering index (CRI):  $\geq 80$

Type of optics: rotosymmetrical wide beam

---

**Normative framework**

---

EN605981 / EN60598-2-1 / EN62471

---

**Installation and maintenance**

---

Installation: ground

Fastening: Screw anchors (or anchoring bolts available as an accessory)

Ø power cable: 8 ÷ 12 mm

Cable gland: M20

---

**Materials**

---

Body: die-cast aluminium alloy UNI EN AB 47100 (copper content < 1%)

Diffusor: highly transparent polycarbonate

Floodlight: torned aluminium sheet for fastening metal anchors

Seal: extruded anti-age silicone

Screws: stainless steel AISI 304

Finish: phospho-chromatation

---

**Colors**

---

grey RAL9006

Cod. **06PT2A8405A**

Sablé 100 Noir

Cod. **06PT2A8405C**


---

---

**Complements**

**06PT997C0**

2 petals kit Colour: dark grey sablé 100 noir.

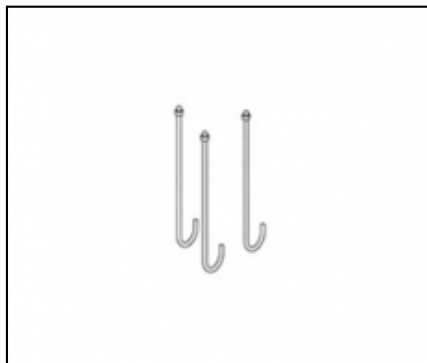

**06PY999X0**

Anchoring bolts kit

---

**NOTE****\*Performance Data**

Values indicated in this technical sheet are to be considered nominal values with a tolerance of +/-7%.

Data of the lighting source flux and efficiency refer to the LED module, without lenses. In case you need data of the LED module complete with lenses, please multiply the mentioned data by 0.9 factor.

**General Data**

The features of the product listed above may be subjected to change without notice. They will have to be confirmed in case of order.

In order to facilitate a constant updating of their products, Cariboni Group reserves the right to make changes without prior notice.