




General Features

| | |
|---------------------------|--------------------------|
| Description: | wall-mounted LED product |
| Insulation class: | class I |
| Rated voltage: | 220-240 V 50/60 Hz |
| Protection Grade: | IP66 |
| Impact protection: | IK08 |
| Power Factor: | > 0.9 |
| Ambient temperature Ta: | -30°C +50°C |
| Weight: | 1 kg |
| Driver: | included |
| Marks and Certifications: | CE |

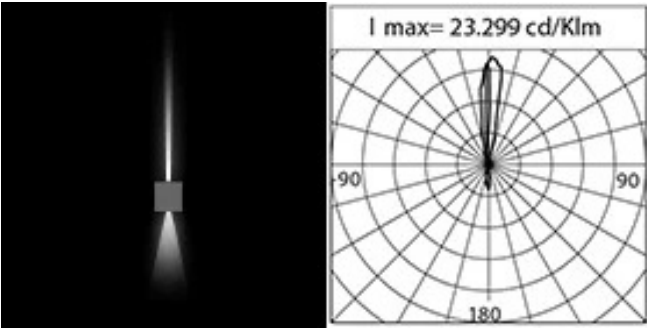

Performance Data*

| | |
|-----------------------|----------|
| LED Current: | 650 mA |
| Source flux: | 845 lm |
| Source power: | 8.1 W |
| Source efficiency: | 104 lm/W |
| Device flux: | 330 lm |
| Device power: | 9 W |
| Appliance efficiency: | 37 lm/W |

Product Sheet

15/05/2023

Grapho mini

Options: ON-OFF

Color Temperature: 3000 K

Type of optics: Blade 4°x17° + Spot 21°x19°

06GR7A40948C

Colour: Sablé 100 Noir

Optical System

Source: LED

Color Temperature: 3000 K

Color Rendering Index (CRI): ≥ 80

Chromatic consistency (SDCM): ≤ 3

Type of optics: Blade 4°x17° + Spot 21°x19°

Optical group life: >60.000h @Ta25°C L80B10

Photobiological safety class: EXEMPT GROUP

Normative References

EN60598-1 / EN60598-2-5 / EN62471 / EN61547

Installation and maintenance

Installation: wall

Wiring: rear cable entry

Materials

Body: die-cast aluminium alloy UNI EN AB 47100 (copper content < 1%)

Screen: UV stabilized technopolymer

Lenses: high-transparency PMMA

Fixing system: base die-cast aluminium alloy UNI EN AB 47100 (copper content < 1%)

Seals: expanded anti-age silicone foam

Screws: stainless steel AISI 316

Finish: phospho-chromatation treated and polyester powder-coated in 16 phases to increase weather resistance

Colors

■ Sablé 100 Noir

Code: **06GR7A40948C**

Product Sheet

15/05/2023

Grapho mini

Options: ON-OFF

Color Temperature: 3000 K

Type of optics: Blade 4°x17° + Spot 21°x19°

06GR7A40948CColour: Sablé 100 Noir

NOTES***Performance data**

The values indicated in this data sheet are nominal values with a tolerance of +/-7%.

Source flux and source efficiency data refer to the LED module without optics; in case you are interested in the performance of the LED module complete with optical system, you must multiply the data reported by the factor 0.9.

General Data

The characteristics of the product listed may be subject to change and must be confirmed when ordering.

In order to promote constant updating of its products, Cariboni Group reserves the right to make changes without prior notice.