



| H (m) | Ø (m) | Em (lux) |
|-------|-------|----------|
| 1 | 0.18 | 49646 |
| 2 | 0.35 | 12411 |
| 3 | 0.50 | 5516 |
| 4 | 0.70 | 3103 |
| 5 | 0.85 | 1986 |

General Features

| |
|--|
| Description: LED fitting for lighting paths and urban spaces |
| Insulation class: class I |
| Rated voltage: 220-240 V 50/60 Hz |
| Protection Grade: IP66 |
| Impact protection: IK09 |
| Surge protection device: integrated 10kV-4kA |
| Power Factor: > 0.95 |
| Ambient temperature Ta: -30°C +50°C |
| Weight: 6 kg |
| Max exposed surface: 0.073 m ² |
| Lateral exposed surface: 0.017 m ² |
| Common mode surge protection: 10 kV |
| Overvoltage protection differential mode: 4 kV |
| Driver: included |
| Driver lifetime: F10 >100.000h @Ta25°C |
| Marks and Certifications: ENEC / ENEC+ / CE |

Performance Data*

| | |
|-----------------------|---------|
| LED Current: | 700 mA |
| Source flux: | 4030 lm |
| Source power: | 50 W |
| Source efficiency: | 81 lm/W |
| Device flux: | 3300 lm |
| Device power: | 54 W |
| Appliance efficiency: | 61 lm/W |
| Glare Index Category: | D6 |

Optical System

| |
|--|
| Source: LED L6 |
| Color Temperature: RGBW - 3000 K |
| Color Rendering Index (CRI): ≥ 70 |
| Chromatic consistency (SDCM): ≤ 3 |
| Type of optics: C 11° Narrow beam |
| Optical group life: >100.000h @ Ta 25°C L90B10 |
| Photobiological safety class: EXEMPT GROUP |
| ULOR: 0% |
| DLOR: 100% |
| Light intensity category: G*3 |
| BUG rating: B3-U0-G0 |

Normative References

| |
|---|
| EN60598-1, EN60598-2-3, EN61547; EN62471, EN55015, EN61000-3-2, EN61000-3-3 |
|---|

Installation and maintenance

| |
|--|
| Installation: pole side, wall-mounted |
| Pole diameter: Ø 60 - 76 - 102 mm |
| Tilt: (wall-mounted) fixed or adjustable installation; (pole side) with adjustable joint can be tilted from -70° to +90° and rotated by 0° / 180°. The pointing and locking system is continuously adjustable. |
| Ø power cable: 10 ÷ 14 mm |
| Cable Gland: PG16 |
| Power supply compartment: independent from the optical group |

Flow adjustment

| | |
|--------------|----------|
| | Standard |
| DALI control | X |

Materials

| |
|--|
| Body: die-cast aluminium alloy UNI EN AB 47100 (copper content < 1%) |
| Screen: tempered flat glass 4 mm |
| Lenses: high-transparency PMMA |
| Fixing system: die-cast aluminium alloy UNI EN AB 47100 (copper content < 1%) |
| Seals: anti-age silicone |
| Screws: stainless steel AISI 304 |
| Finish: phospho-chromatation treated and polyester powder-coated in 16 phases to increase weather resistance |

Colors


| | |
|------------------|------------------------------|
| ■ Sablé 100 Noir | Code: 06LN2C470RB8CHL |
|------------------|------------------------------|

Complements



06LN901C0

B225 Adjustable joint.
Colour: Sablé 100 Noir.

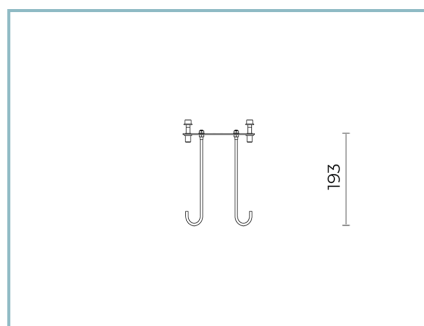


06LN914J0

B246 Kit metal anchors LEVANTE 2.0




06LN911B0

B239 Lightshade visor kit.
Levante 2.0 x-small. Colour: black
RAL9005.

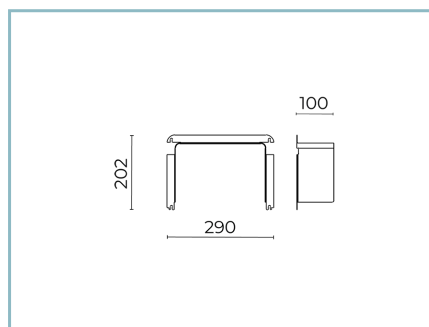

06LN912B0

B240 Lightshade visor kit.
Levante 2.0 small. Colour: black
RAL9005.

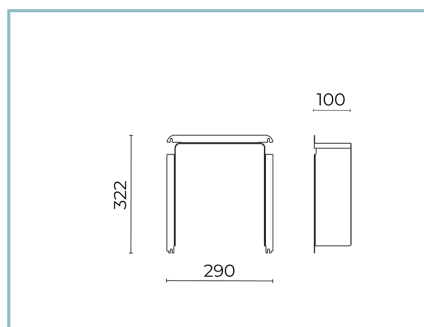

06LN913B0

B241 Lightshade visor kit.
Levante 2.0 medium. Colour: black
RAL9005.

NOTES

*Performance data

The values indicated in this data sheet are nominal values with a tolerance of +/-7%.

Source flux and source efficiency data refer to the LED module without optics; in case you are interested in the performance of the LED module complete with optical system, you must multiply the data reported by the factor 0.9.

General Data

The characteristics of the product listed may be subject to change and must be confirmed when ordering.

In order to promote constant updating of its products, Cariboni Group reserves the right to make changes without prior notice.