





General Features

Description:	wall -mounted LED product
Insulation class:	class II
Rated voltage:	220-240 V 50/60 Hz
Protection Grade:	IP66
Impact protection:	IK08
Power Factor:	> 0.9
Ambient temperature Ta:	-30°C +50°C
Weight:	2.00 kg
Max exposed surface:	0,024 m ²
Lateral exposed surface:	0,0085 m ²
Driver:	remote (to be ordered separately)
Marks and Certifications:	CE



AS-D Applique



H 2500

Performance Data*

Source flux:	780 lm
Source power:	8 W
Source efficiency:	98 lm/W
Device flux:	500 lm
Device power:	8 W
Appliance efficiency:	63 lm/W

Product Sheet

Rev. 17/01/2023

Lit xs wall

Options: DALI

Color Temperature: 2700 K

Type of optics: AS-D

06LX1A28C5CV

Colour: Sablé 100 Noir

Optical System

Source: LED

Color Temperature: 2700 K

Color Rendering Index (CRI): ≥ 80 Chromatic consistency (SDCM): ≤ 3

Type of optics: AS-D

Optical group life: >60.000h @Ta25°C L80B10

Photobiological safety class: EXEMPT GROUP

ULOR: 0%

DLOR: 100%

Normative References

EN60598-1 / EN60598-2-1 / EN62471 / EN61547

Installation and maintenance

Installation: wall installation

Fixing: screw anchors

Flow adjustment

Standard

DALI control

X

Materials

Body: die-cast aluminium alloy UNI EN AB 47100 (copper content < 1%)

Screen: comfort tempered flat glass 5 mm

Seals: expanded anti-age silicone foam

Screws: stainless steel AISI 304

Finish: phospho-chromatation treated and polyester powder-coated in 16 phases to increase weather resistance

Colors Sablé 100 NoirCode: **06LX1A28C5CV**

Product Sheet

Rev. 17/01/2023

Lit xs wall

Options: DALI


Color Temperature: 2700 K

Type of optics: AS-D

06LX1A28C5CV


Colour: Sablé 100 Noir

Complements

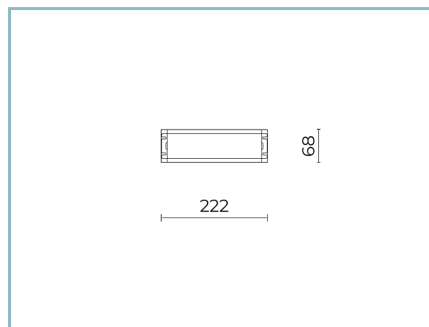

06LL914AB0

DALI driver
150W-24V IP67

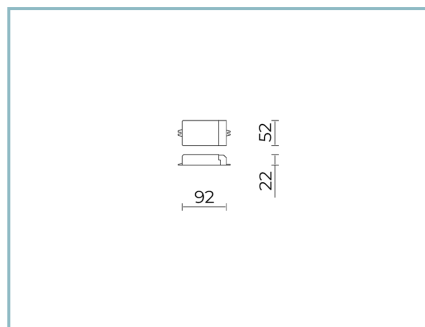

06LX900X0

B176 DALI driver 16W IP20

NOTES

*Performance data

The values indicated in this data sheet are nominal values with a tolerance of +/-7%.

Source flux and source efficiency data refer to the LED module without optics; in case you are interested in the performance of the LED module complete with optical system, you must multiply the data reported by the factor 0.9.

General Data

The characteristics of the product listed may be subject to change and must be confirmed when ordering.

In order to promote constant updating of its products, Cariboni Group reserves the right to make changes without prior notice.