





**General Features**

|  |
|--|
| Description: LED fitting for lighting paths and urban spaces |
| Insulation class: class II                                   |
| Rated voltage: 220-240 V 50 Hz                               |
| Protection Grade: IP66                                       |
| Impact protection: IK08                                      |
| Power Factor: > 0.9  |
| Ambient temperature Ta: -30°C +50°C                          |
| Weight: 2.00 kg  |
| Max exposed surface: 0,027 m²                                |
| Lateral exposed surface: 0,027 m²                            |
| Driver: included   |
| Marks and Certifications: CE                                 |

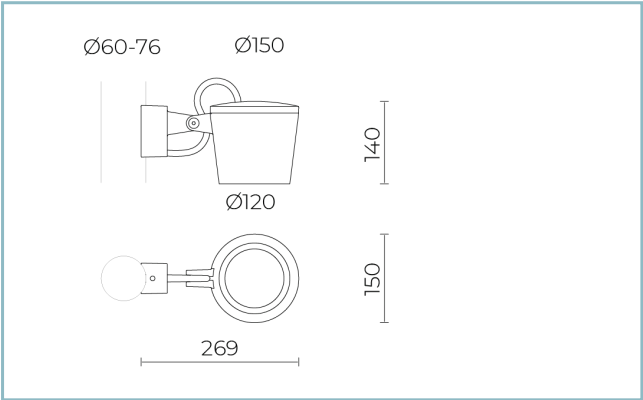

**Performance Data\***

|                       |          |
|-----------------------|----------|
| LED Current:          | 500 mA   |
| Source flux:          | 1730 lm  |
| Source power:         | 17 W     |
| Source efficiency:    | 102 lm/W |
| Device flux:          | 1210 lm  |
| Device power:         | 20 W     |
| Appliance efficiency: | 61 lm/W  |
| Glare Index Category: | D6       |

### Optical System

Source: CoB LED

Color Temperature: 2700 K

Color Rendering Index (CRI):  $\geq 90$

Chromatic consistency (SDCM):  $\leq 3$

Type of optics: U-D 90° Diffused beam

Optical group life: >60.000h @Ta25°C L80B10

Photobiological safety class: EXEMPT GROUP

ULOR: 0%

DLOR: 100%

Light intensity category: G\*6

### Normative References

EN60598-1 / EN60598-2-3 / EN62471 / EN61547

### Installation and maintenance

Installation: side pole

Pole diameter: Ø 60 - 76 mm

Tilt: -90° +45°, continuously-adjustable pointing and locking system

Fixing: fixing base made of die-cast aluminium alloy UNI EN AB 47100 (copper content < 1%) for poles Ø 60-76mm

Wiring: pre-wired product with cable L=5m

Ø power cable: 9 ÷ 14 mm

Cable Gland: M29

Power supply compartment: independent from the optical group

### Flow adjustment

On request

DALI control

X

### Materials

Body: die-cast aluminium alloy UNI EN AB 47100 (copper content < 1%)

Screen: acid-etched glass

Lenses: highly transparent technopolymer lenses

Fixing system: die-cast aluminium alloy UNI EN AB 47100 (copper content < 1%)

Seals: expanded anti-age silicone foam

Screws: stainless steel AISI 304

Wiring plate: zinc-plated steel

Finish: phospho-chromatation treated and polyester powder-coated in 16 phases to increase weather resistance

### Colors

■ Sablé 100 Noir

Code: **06OM1A148B2C**

**Product Sheet**

Rev. 27/09/2023

**Omikron Pole**


Options: for poles Ø 60 - 76 mm

Color Temperature: 2700 K

Type of optics: U-D 90° Diffused beam

**06OM1A148B2C**

Colour: Sablé 100 Noir

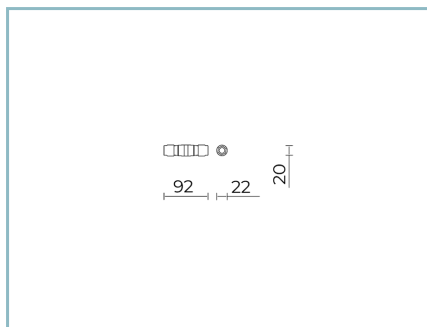**Complements**

06KS918C0

B137 2 - way connector IP68

**NOTES****\*Performance data**

The values indicated in this data sheet are nominal values with a tolerance of +/-7%.

Source flux and source efficiency data refer to the LED module without optics; in case you are interested in the performance of the LED module complete with optical system, you must multiply the data reported by the factor 0.9.

**General Data**

The characteristics of the product listed may be subject to change and must be confirmed when ordering.

In order to promote constant updating of its products, Cariboni Group reserves the right to make changes without prior notice.