

Product Sheet**Levante Floodlight**

Options: medium
 Colour temperature: 3000 K
 Type of optics: asymmetrical LT-06

06LV6E80937DHM3

Colour: white RAL9003

Project Num.

Date

**General features**

Description: LED floodlight

Insulation class: class II

Nominal voltage: 230 V 50 Hz

Protection level IP: IP66

Protection against impact: IK07

Surge Protection Device: integrated 10kV-10kA, Type 3, equipped with LED signaling and thermofusible for disconnection at the end of life; impulse withstand CL II 10kV DM

Power factor: > 0.90

Ambient temperature Ta: -30°C +50°C

Weight: 8.00 kg

Maximum exposed surface: 0.17 m²Lateral exposed surface: 0,04 m²



Common mode overvoltage protection: 10 kV

Differential mode overvoltage protection: 10 kV

Driver: included

Labels and Certifications: ENEC / CE

Warranty: 5 years for LED fittings

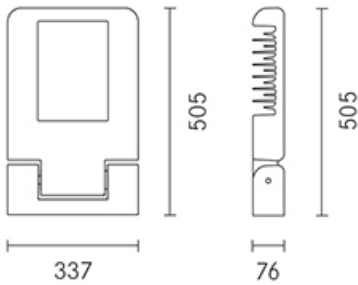**Performance Data***

LED current:	700 mA	525 mA	350 mA
Flux source:	15145 lm	12000 lm	8485 lm
Power source:	96 W	71 W	46,5 W
Efficiency of source:	158 lm/W	169 lm/W	182 lm/W
Flux fitting:	13030 lm	10320 lm	7295 lm
Power fitting:	104,5 W	79 W	53 W
Efficiency of fitting:	125 lm/W	131 lm/W	138 lm/W
Dazzling index category:	D4	D5	D5

Optical System

Source: LED R4
Colour temperature: 3000 K
Colour rendering index (CRI): ≥ 70
Type of optics: asymmetrical LT-06
Optical unit lifetime: >160,000h @700mA @Ta25°C TM21 L80B20 >160,000h @700mA @Ta25°C TM21 L80B10
Photobiological safety class: EXEMPT GROUP
ULOR: 0%
DLOR: 100%
Luminous intensity category: G*6
Normative framework
EN605981 / EN60598-2-3 / EN60598-2-5 / EN62471 / EN61547

Flux regulation

	Standard	On request
Self-learning virtual midnight	X	
Constant Light Output (CLO)		X
1-10V Regulation		X
Main voltage variation		X
Pilot line		X
DALI Regulation		X
Remote control system (PLC) telemanagement		X
Wireless telemanagement		X
Motion / brightness detectors		X

Installation and maintenance

Installation: wall / ground / pole
Poles diameter: \varnothing 60 - 76 - 102 mm
Inclination: fastened or adjustable with step 15°
Fastening: adjustable bracket with click positioning and a 15° step
\varnothing power cable: 10 ÷ 14 mm
Cable gland: PG16


Materials

Body: die-cast aluminium alloy UNI EN AB 47100 (copper content < 1%)
Lenses: PMMA
Seal: extruded anti-age silicone
Screws: stainless steel AISI 304
Finish: phospho-chromatation treated and polyester powder-coated in 16 phases to increase weather resistance

Colors


white RAL9003	Cod. 06LV6E80937DHM3
grey RAL9006	Cod. 06LV6E80937AHM3
Sablé 100 Noir	Cod. 06LV6E80937CHM3

Complements

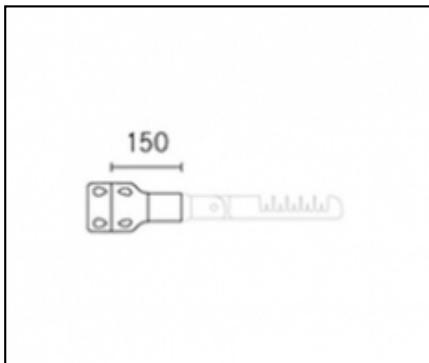


06AK903A0

L3 joint kit single for \varnothing 60-76 mm poles.
Colour: dark grey RAL9006.

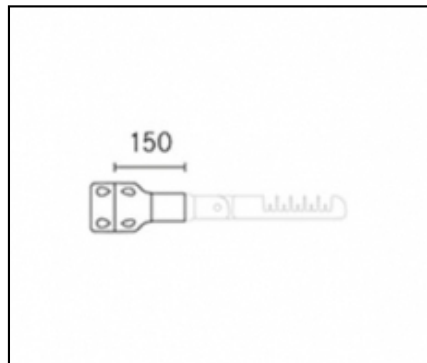


06AK903C0

L3 joint kit single for \varnothing 60-76 mm poles.
Colour: dark grey Sablé 100 Noir.

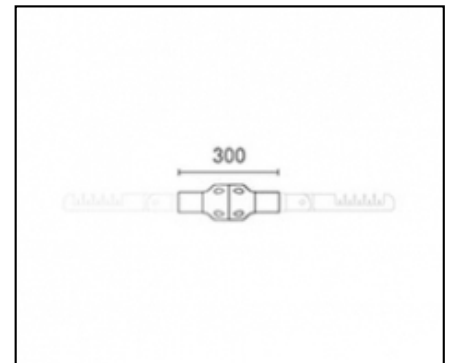


06AK904A0

L4 joint kit double for \varnothing 60-76 mm poles.
Colour: grey RAL9006.

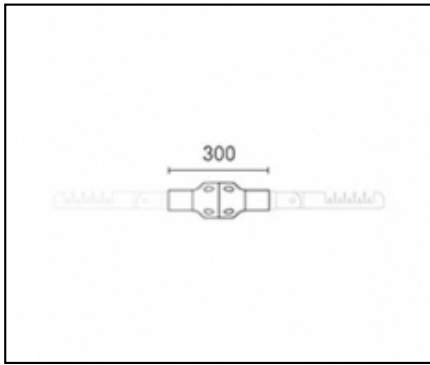


06AK904C0

L4 joint kit double for Ø 60-76 mm poles.
Colour: dark grey Sablé 100 Noir.

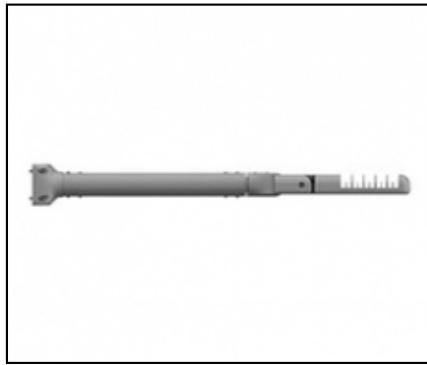

06AK951A0

B1 P arm for wall-mounting. Colour: grey
RAL9006.

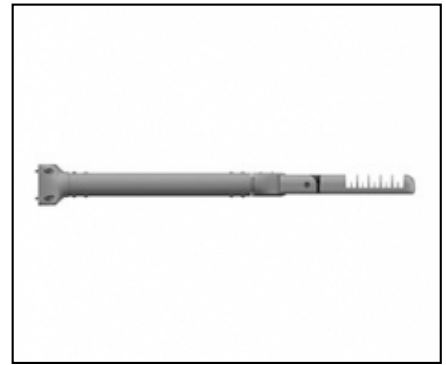

06AK951C0

B1 P arm for wall-mounting. Colour: dark
grey Sablé 100 Noir.



06AK953C0

I1 Spike for ground installation Colour: dark
grey Sablé 100 Noir.



06AK954A0

L10 joint LEVANTE MEDIUM for Ø 60 mm
pole. Colour: grey RAL9006.



06AK954C0

L10 joint LEVANTE MEDIUM for Ø 60 mm
pole. Colour: dark grey Sablé 100 Noir.



06AK954D0

L10 joint LEVANTE MEDIUM for Ø 60 mm
pole. Colour: white RAL9003.

NOTE

*Performance Data

Values indicated in this technical sheet are to be considered nominal values with a tolerance of +/-7%.

Data of the lighting source flux and efficiency refer to the LED module, without lenses. In case you need data of the LED module complete with lenses, please multiply the mentioned data by 0.9 factor.

General Data

The features of the product listed above may be subjected to change without notice. They will have to be confirmed in case of order. In order to facilitate a constant updating of their products, Cariboni Group reserves the right to make changes without prior notice.