




General Features

- Description: LED fitting for lighting façades, paths and urban spaces
- Insulation class: Class III
- Rated voltage: 24 Vdc
- Protection Grade: IP66
- Impact protection: IK07
- Surge protection device: integrated 2kV-4kV
- Power Factor: > 0.95
- Ambient temperature Ta: -30°C +50°C
- Weight: 6.2 kg
- Max exposed surface: 0.04 m²
- Lateral exposed surface: 0.021 m²
- Common mode surge protection: 2 kV
- Overvoltage protection differential mode: 4 kV
- Driver: remote (to be ordered separately)
- Marks and Certifications: CE

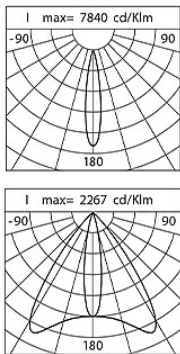

Performance Data*	M18_UP	ELL50x18_DOWN
Source flux:	1910 lm	1910 lm
Source power:	20 W	20 W
Source efficiency:	96 lm/W	96 lm/W
Device flux:	1565 lm	1445 lm
Device power:	21 W	21 W
Appliance efficiency:	75 lm/W	69 lm/W

Product Sheet

30/07/2024

Kinetic Wall

Size: Biemission

Color Temperature: TW 2000K - 4000 K

Type of optics: M 18° + ELL50°x18°

06KI4E0506C19DHS6

Colour: White RAL9003

Optical System

Source: 10 LED

Color Temperature: TW 2000K - 4000 K

Color Rendering Index (CRI): ≥ 80 Chromatic consistency (SDCM): ≤ 3

Type of optics: M 18° + ELL50°x18°

Optical group life: >60.000 h @ Ta 25°C L80B10

Photobiological safety class: EXEMPT GROUP

ULOR: 0%

DLOR: 100%

Normative ReferencesEN60598-1 / EN60598-2-3 / EN61547 / EN62471 / EN55015 /
EN61000-3-2 / EN61000-3-3**Installation and maintenance**

Installation: ceiling

Tilt: -90° +130° continuously adjustable

Ø power cable: 7 ÷ 13 mm

Cable Gland: M20

Power supply compartment: independent from the
optical group**Flow adjustment**

Standard

DALI control

X

MaterialsBody: die-cast aluminium alloy UNI EN AB 47100 (copper
content < 1%)

Screen: tempered flat glass 4 mm

Lenses: high-transparency PMMA

Seals: anti-age silicone

Screws: stainless steel AISI 304

Finish: phospho-chromatation treated and polyester
powder-coated in 16 phases to increase weather resistance**Colors** White RAL9003Code: **06KI4E0506C19DHS6**

Product Sheet

30/07/2024

Kinetic Wall

Size: Biemission


Color Temperature: TW 2000K - 4000 K

Type of optics: M 18° + ELL50°x18°

06KI4E0506C19DHS6


Colour: White RAL9003

Complements

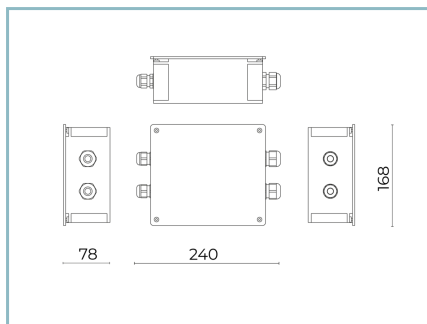

06KI906X0


D10 Connection Kit

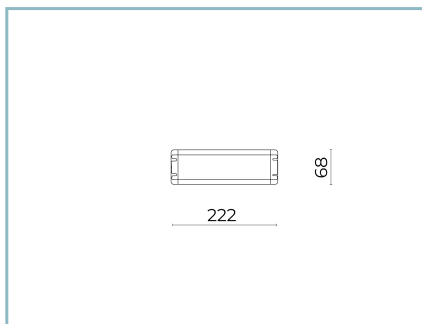

06KI909X0


D13 Kit driver

Complements

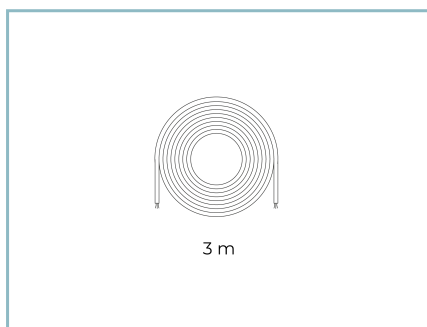


06KI912X0

Kit cable

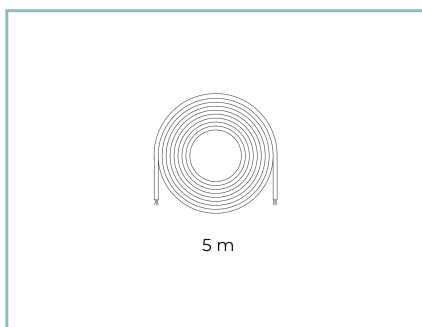


06KI913X0

Kit cable

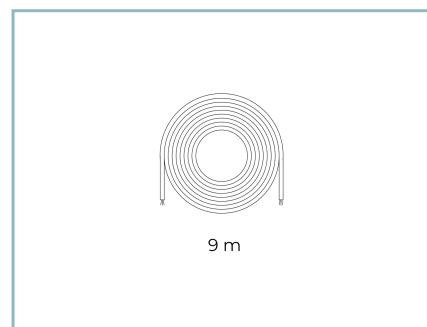

06KI914X0

Kit cable

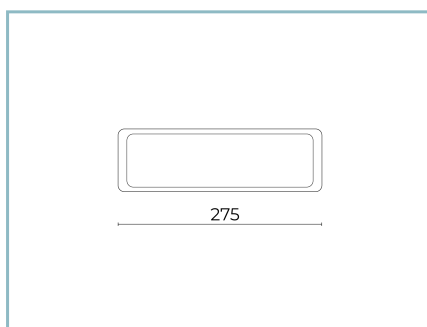

06KI911X0

Wall Spacer

Product Sheet

30/07/2024

Kinetic Wall

Size: Biemission

Color Temperature: TW 2000K - 4000 K

Type of optics: M 18° + ELL50°x18°

06KI4E0506C19DHS6Colour: White RAL9003

NOTES***Performance data**

The values indicated in this data sheet are nominal values with a tolerance of +/-7%.

Source flux and source efficiency data refer to the LED module without optics; in case you are interested in the performance of the LED module complete with optical system, you must multiply the data reported by the factor 0.9.

General Data

The characteristics of the product listed may be subject to change and must be confirmed when ordering.

In order to promote constant updating of its products, Cariboni Group reserves the right to make changes without prior notice.