



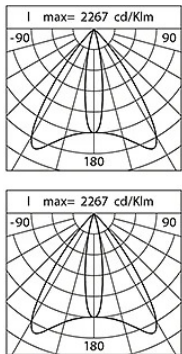

**General Features**

- Description: LED fitting for lighting façades, paths and urban spaces
- Insulation class: Class III
- Rated voltage: 24 Vdc
- Protection Grade: IP66
- Impact protection: IK07
- Surge protection device: integrated 2kV-4kV
- Power Factor: > 0.95
- Ambient temperature Ta: -30°C +50°C
- Weight: 6.2 kg
- Max exposed surface: 0.04 m<sup>2</sup>
- Lateral exposed surface: 0.021 m<sup>2</sup>
- Common mode surge protection: 2 kV
- Overvoltage protection differential mode: 4 kV
- Driver: remote (to be ordered separately)
- Marks and Certifications: CE

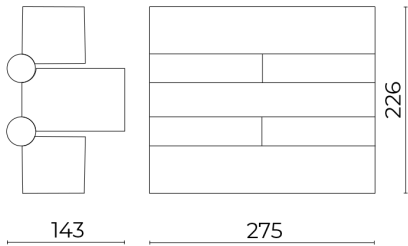

Performance Data*	ELL50x18_UP	ELL50x18_DOWN
Source flux:	1820 lm	1820 lm
Source power:	20 W	20 W
Source efficiency:	91 lm/W	91 lm/W
Device flux:	1305 lm	1305 lm
Device power:	21 W	21 W
Appliance efficiency:	62 lm/W	62 lm/W

**Optical System**

Source: 10 LED
Color Temperature: RGBW - 3000 K
Color Rendering Index (CRI): ≥ 80
Chromatic consistency (SDCM): ≤ 3
Type of optics: ELL50°x18° + ELL50°x18°
Optical group life: >60.000 h @ Ta 25°C L80B10
Photobiological safety class: EXEMPT GROUP
ULOR: 0%
DLOR: 100%

**Normative References**

EN60598-1 / EN60598-2-3 / EN61547 / EN62471 / EN55015 / EN61000-3-2 / EN61000-3-3
-----------------------------------------------------------------------------------

**Installation and maintenance**

Installation: ceiling
Tilt: -90° +130° continuously adjustable
Ø power cable: 7 ÷ 13 mm
Cable Gland: M20
Power supply compartment: independent from the optical group

**Flow adjustment**

	Standard
DALI control	X


**Materials**

Body: die-cast aluminium alloy UNI EN AB 47100 (copper content < 1%)
Screen: tempered flat glass 4 mm
Lenses: high-transparency PMMA
Seals: anti-age silicone
Screws: stainless steel AISI 304
Finish: phospho-chromatation treated and polyester powder-coated in 16 phases to increase weather resistance


**Colors**

 Corten	Code: <b>06KI4E050RC13UHS5</b>
------------------------------------------------------------------------------------------	--------------------------------

Complements

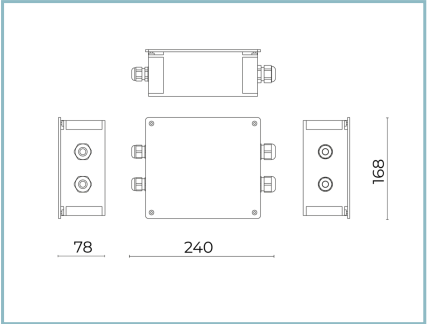


06KI906X0  
D10 Connection Kit

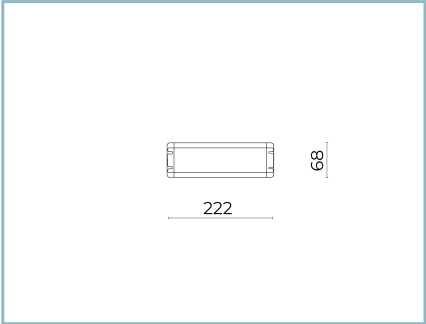


06KI909X0  
D13 Kit driver


Complements

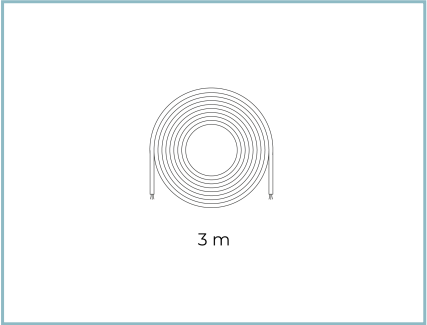


06KI912X0  
Kit cable

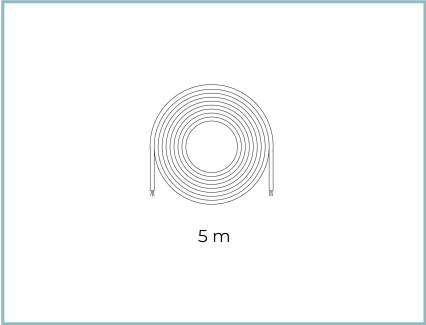

06KI913X0  
Kit cable

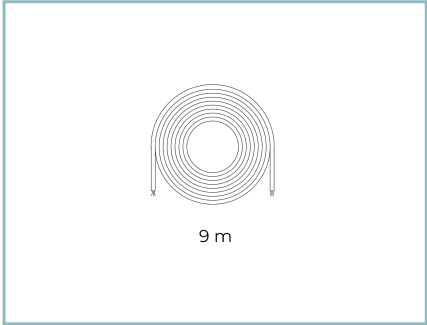

06KI914X0  
Kit cable

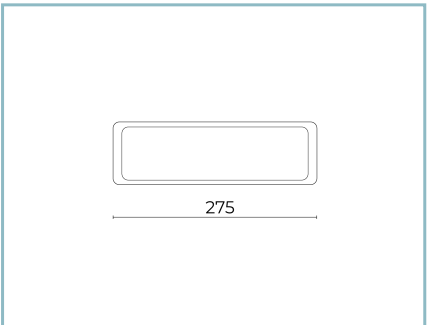

06KI911X0  
Wall Spacer

---

**Product Sheet**

30/07/2024

**Kinetic Wall**

Size: Biemission

Color Temperature: RGBW - 3000 K

Type of optics: ELL50°x18° + ELL50°x18°

**06KI4E050RC13UHS5**Colour: Corten

---

---

**NOTES****\*Performance data**

The values indicated in this data sheet are nominal values with a tolerance of +/-7%.

Source flux and source efficiency data refer to the LED module without optics; in case you are interested in the performance of the LED module complete with optical system, you must multiply the data reported by the factor 0.9.

**General Data**

The characteristics of the product listed may be subject to change and must be confirmed when ordering.

In order to promote constant updating of its products, Cariboni Group reserves the right to make changes without prior notice.